



# The best choice


for precise metering applications

#### **RJ SERIES OF METERING PUMPS**

Roto RJ Series pumps are for low flow applications demanding high accuracy and repeatability. They can handle a wide variety of fluids ranging from clean and clear liquids to abrasive, corrosive, viscous and solid laden media. The pumps can maintain flow with repeatable accuracy of  $\pm$ 1%. The RJ Series is available in 6 capacities (0.68 – 500 l/h) and 3 differential pressure ranges (6,12 & 24 Bar).

#### **MATERIAL OF CONSTRUCTION**

Standard RJ Range pumps are manufactured with 316 stainless steel wetted components and a single mechanical seal. The stator elastomers include; Natural, Nitrile, EPDM, Chloro-sulphonated rubber, HNBR, Viton, and Aflas®. Pumps can be manufactured in various exotic alloys including Hastealloy, Duplex, and Alloy 20 to fit the application.

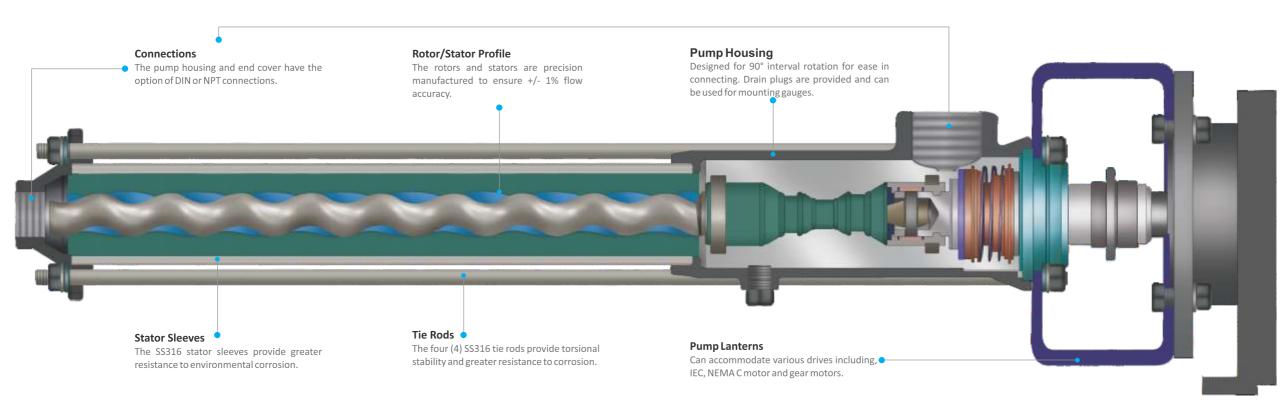

#### **ADVANTAGES**

- Capacity is directly proportional to speed
- Inherently self-priming
- No internal valves no clogging
- Low NPSH required
- Linear flow with low shear

- Reversible
- Suction lift capability up to 9.5 meter water column
- Easily changeable pumping elements for different capacities

Cosmetic

Mining

Food

- Simple to operate
- Highly efficient

#### **APPLICATIONS**

Roto RJ series pumps are designed to handle a wide variety of fluids for number of applications in industries such as:

- Wastewater Treatment
- Pulp & Paper
- Chemical Processing

- Pharmaceutical
- Petrochemical
- Petroleum Refining

e to operate

**Pump Size** RJ - 014 120 306 210 RJ - 034 120 306 210 RJ - 072 120 306 210 RJ - 074 130 384 288 RJ - 142 120 340 244 RJ - 144 200 448 352 RJ - 302 120 358 262 RJ - 304 240 488 392 RJ - 80L 120 358 262

DIMENSIONS

Available in 1" NPT port connection at Suction &~% " NPT connection at Discharge in all pump sizes.

- All dimensions are in mm
- All dimensions & specifications are subject to change without prior notice

SELECTION TABLE					
Pump Size		PRESSURE BAR			
		0	6	12	24
RJ - 01	FLOW RATE LPH	7.50	7.20	7.20	6.90
RJ - 03		18.90	18.20	18.10	17.30
RJ - 07		45.90	44.10	44.00	42.10
RJ - 14		91.40	87.90	87.60	84.30
RJ - 30		180.00	173.00	172.30	166.30
RJ - 80L		500.00	460.00	-	-
Canacities of numn sizes calculated at 500 PPM					

Capacities of pump sizes calculated at 500 RPM





## **ROTO PUMPS LTD.**

### Regd. Off. & Global Headquarters

13, Roto House, Noida Special Economic Zone, Noida-201305, UP, India

Tel: +91 120 2567902-5, Fax: +91 120 2567911

Email: contact@rotopumps.com CIN: L28991UP1975PLC004152

#### Overseas Establishments

#### Roto Pumps Ltd., UK

Email: sales@rotopumps.co.uk Web: www.rotopumps.co.uk

#### Roto Pumps Ltd., Australia

Email: sales@rotopumps.com.au Web: www.rotopumps.com.au

#### Roto Pumps North America Inc.

Email: sales@rotopumpsna.com Web: www.rotopumpsna.com

#### Roto Pumps Africa (Pty.) Ltd.

Email: sales@rotopumps.co.za Web: www.rotopumps.co.za

#### **Roto Pumps Gmbh**

Email: sales.rpg@rotopumps.com Web: www.rotopump.de

#### Roto Pumps (Malaysia) Sdn. Bhd.

Email: salesmy@rotopumps.com Web: www.rotopumps.com.my

